
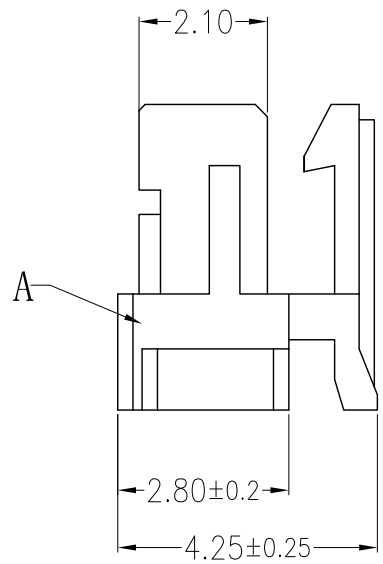


REV	DESCRIPTION	DESIGN	DATE
A0	Release	吴丹平	2016.05.25

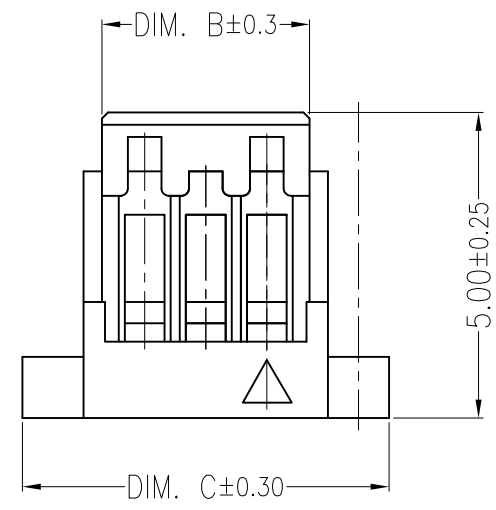


### 主要技术参数 Main Specifications

线 数 (Poles): 02 to 10  
 接触电阻 (Contact resistance):  $\leq 20m\Omega$   
 绝缘电阻 (Insulation resistance):  $\geq 100M\Omega$   
 额定电压 (Rated voltage): 50V AC DC  
 额定电流 (Rated current): 1.0A AC DC  
 耐 电 压 (Withstand Voltage): 500V AC/minute  
 温度范围 (Temperature Range):  $-25^{\circ}C \sim +85^{\circ}C$

### ORDER INFORMATION:

<b>A1002Y-**-A5W-P</b>	
PART No.	PACKAGING: P=PE
No. OF CIRCUITS: 02~10	PLASTIC MATERIAL: A5W=PA66 (WHITE)

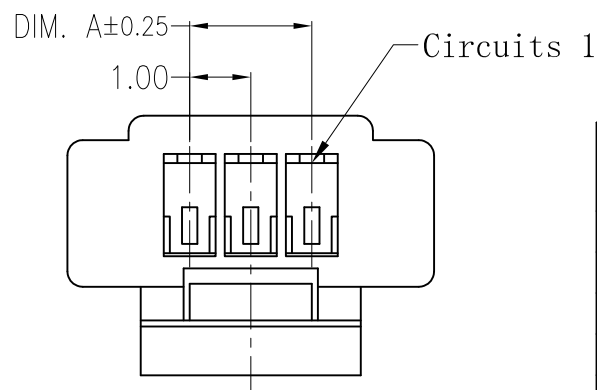

Circuits	Dimensions (mm)		
	DIM. A	DIM. B	DIM. C
02	1.00	2.40	5.00
03	2.00	3.40	6.00
04	3.00	4.40	7.00
05	4.00	5.40	8.00
06	5.00	6.40	9.00
07	6.00	7.40	10.00
08	7.00	8.40	11.00
09	8.00	9.40	12.00
10	9.00	10.40	13.00

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
C				
B				
A	PEDESTAL	1 PCS	PA66	COLOR:WHITE

<b>JKUN</b> 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO., LTD.		TITLE: - 1.0mmPITCH HOUSING
X.±0.5 .X±0.3 .XX±0.25 -- 	X.±5' .X±2' .XX±1' -- UNITS: mm	USE: CUSTOMER APPD: 邵敬和 CHKD: 田峰 DR: 吴丹平
		PART NO.: A1002Y-**-A5W-P DWG NO.: JKUN-GCCP-0624 SCALE: 1 : 1 SHEET: 1 / 1