
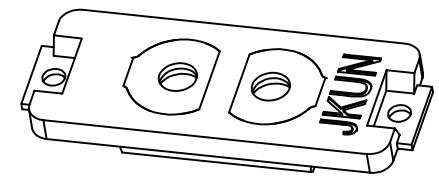
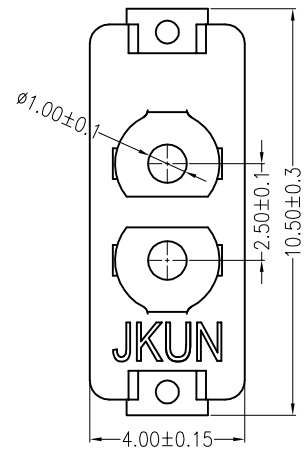
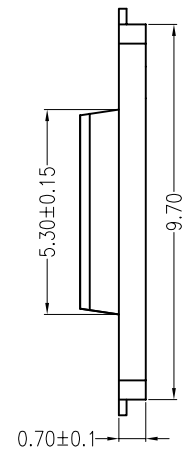





REV	DESCRIPTION	DESIGN	DATE
A0	Release	吴丹平	2016.04.30

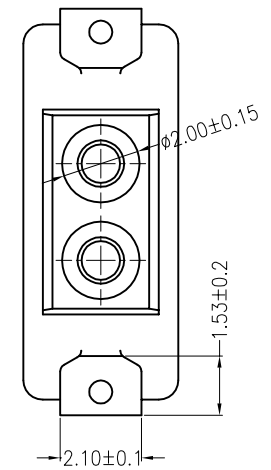


主要技术参数 Main Specifications

- 线 数 (Poles): 02
- 接触电阻 (Contact resistance): $\leq 20m\Omega$
- 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
- 额定电压 (Rated voltage): 125V AC DC
- 额定电流 (Rated current): 1.0A AC DC
- 耐 电压 (Withstand Voltage): 1500V AC/minute
- 温度范围 (Temperature Range): $-40^{\circ}C \sim +120^{\circ}C$

ORDER INFORMATION:

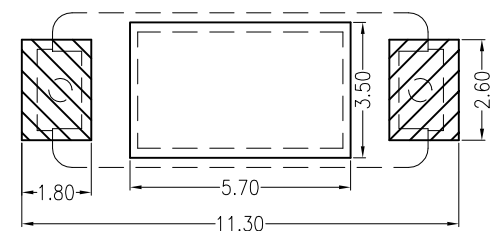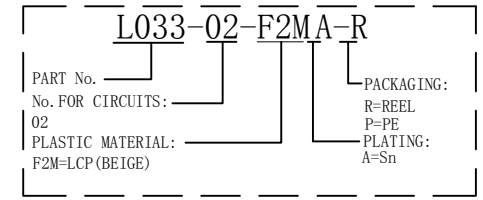

Board Layout
General Tolerance: ± 0.05

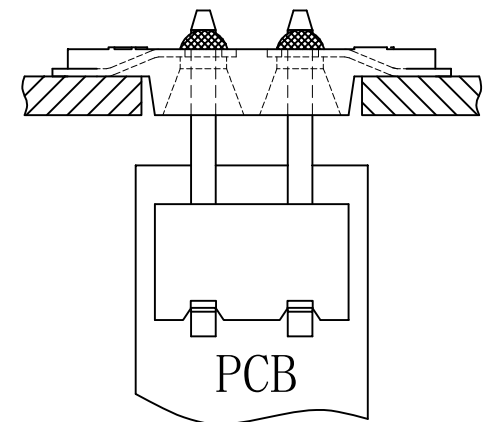

Assembly Layout

C				
B	CONTACT	2 PCS	Brass	Sn-plated
A	PEDESTAL	1 PCS	LCP	UL 94V-0, COLOR:BEIGE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH

JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO.,LTD.			TITLE: - 2.5mmPITCH 180°WAFER SMT TYPE	
X.±0.5	X.±5°	USE:	PART NO.:	
.X±0.3	.X±2°	CUSTOMER	L033-02-F2MB-R	
.XX±0.25	.XX±1°	APPD:	DWG NO.:	
--	--	邵敬和	JKUN/GCCP-0058	
⊕	◁	CHKD:	SCALE	SHEET
UNITS:	mm	田峰	1 : 1	1 / 1
		DR:		
		蒋建银		